



IFW

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket No.

TAEKEMA HARKO

NL030774

Serial No.: 10/561,455

Group Art Unit: 3632

Filed: DECEMBER 20, 2005

Examiner: Ramon O. Ramirez

Title: FOLDABLE STAND

Commissioner for Patents
Washington, D.C. 20231

CLAIM FOR PRIORITY

Sir:

A certified copy of the European Application No. -
3101887.2 filed June 25, 2003 referred to in the Declaration of the
above-identified application is attached herewith.

Applicant(s) claim(s) the benefit of the filing date of
said European application.

Respectfully submitted,

Enclosure

By /Paul Im/
Paul Im, Reg. 50,418
Attorney
(914) 333-9627

CERTIFICATE OF MAILING

It is hereby certified that this correspondence is being deposited with the
United States Postal Service as first-class mail in an envelope addressed to:

COMMISSIONER FOR PATENTS
Washington, D.C. 20231

On Nov. 7, 2008
By [Signature]



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101887.2

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:

Application no.: 03101887.2

Demande no:

Anmeldetag:

Date of filing: 25.06.03

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.

Groenewoudseweg 1

5621 BA Eindhoven

PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.

If no title is shown please refer to the description.

Si aucun titre n'est indiqué se référer à la description.)

Foldable stand

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

A61B19/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Foldable stand

The invention relates to a foldable stand, comprising a longitudinally extending support, which is carried by two legs, each leg being connected to the support via a journal having a central axis, said stand being foldable between an operational position, in which the legs extend along a surface, and the support extends away from the surface, to a rest position, in which the legs extend along the surface, and the support extends along the surface substantially parallel to the legs.

The invention further relates to an irradiation device for the human body comprising such a foldable stand.

A foldable stand of the type described in the opening paragraph is known from US 4,866,284. This known foldable stand is comprised in an irradiation device for irradiating the human body with ultraviolet radiation. The support is pivotally connected to a wide base for stable positioning of the device on a surface. Said base comprises a recess for receiving the support in the rest position, thus forming two legs. The support further carries a housing provided with an irradiation unit which is pivotally connected to the support. During operation, the legs support the device on the surface in a stable position by extending along the surface, and the support extends away from the surface. Ultraviolet radiation leaves the housing through a radiation emission plane which extends in an imaginary horizontal plane. After use, the housing and the support are rotated to a rest position extending substantially parallel to the legs along the surface, the support being received in the recess between the legs. Although this known stand is relatively compact in the folded position, the stand is relatively complex to fold. This is cumbersome for the user.

It is an object of the invention to provide a foldable stand which is easily foldable. To achieve this object, a foldable stand according to the invention is characterized in that a housing is provided to which the support is fixedly mounted, and a coupling element is provided in said housing for rotationally coupling the central axes of the journals of the

legs at an angle relative to each other. In this manner folding the stand between the operational position and the rest position requires only one operation from a user. By moving the support from its operational position extending away from the surface to its rest position extending along the surface, the legs are automatically taken along from an operational position extending along the surface and enclosing an angle between them, to a rest position extending along the surface substantially parallel to each other. When moving the support vice versa from the rest position to the operational position, the legs are automatically taken along from their position extending along the surface substantially parallel to each other, to their position extending along the surface and enclosing an angle between them. The foldable stand is thus easily foldable and user-friendly. Furthermore, the fact that the legs enclose an angle between them in the operational position ensures a stable position of the stand on the surface without the need for a heavy construction of the legs.

An embodiment of a foldable stand according to the invention is characterized in that each journal has a semi-cylindrical recess for cooperation with a semi-cylindrical protrusion provided on the coupling element via sliding and rotating surfaces. This offers a simple construction of the journals and the coupling element, because sliding and rotation is combined in one action, to secure that the legs are moving simultaneously.

A further embodiment of a foldable stand according to the invention is characterized in that the coupling element has a central axis and comprises two cylindrical parts arranged in parallel extending transversally to said central axis, the central axis of the coupling element intersecting a central axis of at least one journal at the centre of at least one cylindrical part. In this manner the housing is less heavily loaded and the coupling element does not need a special bearing in the housing.

It is advantageous when the stand has elements for supporting the stand in a storage position with the legs and the support extending parallel to each other. Thus the compact foldable stand can be stored upright without the need of a wall or the like to support it.

It is furthermore advantageous when the central axes of the legs enclose an angle of 30° in the operational position.

A further embodiment of a foldable stand according to the invention is characterized in that the coupling element comprises a central coupling shaft provided with longitudinally extending grooves along its outer surface, and the two journals are provided with bevelled teeth for cooperation with said grooves. In this manner a solid and cost-effective construction is achieved.

A further embodiment of a foldable stand according to the invention is characterized in that the central axis of the central coupling shaft, the longitudinal axis passing through both teeth and the central axis of a bearing carrying the journals intersect at one point. In this manner the parts only move rotationally with respect to each other during operation, which renders the construction more robust.

The invention further relates to an irradiation device for the human body comprising a foldable stand, characterized in that said foldable stand is a stand according to the invention.

The invention will be described in more detail hereinafter with reference to the drawings, in which

Figs. 1a and 2a show a schematic perspective view of a foldable stand according to the invention in a rest position, and in an operational position, respectively, and Figures 1b and 2b show a top view of said stand in a rest position, and in an operational position, respectively,

Figs. 3a and b show a detail of a first embodiment of a foldable stand according to the invention,

Fig. 4 shows a detail of a second embodiment of a foldable stand according to the invention, and

Figs. 5a, b and c show details of a third embodiment of a foldable stand according to the invention.

Figure 1 shows different schematic views of a foldable stand 1 according to the invention, in a rest position (Figs. 1a, b) and an operational position (Figs. 2a,b). The foldable stand 1 comprises a longitudinally extending support 2, which is carried by two legs 3, each leg 3 being connected to the support 2 via a journal 4 having a central axis 5. A housing 6 is provided to which the support 2 is fixedly mounted, and a coupling element 7 is provided in said housing 6 for rotationally coupling the central axes 5 of the journals 4 of the legs 3 at an angle relative to each other. In this manner, the stand 1 is foldable by a user in only one operation between the operational position, in which the legs 3 extend along the surface and enclose an angle between them and the support 2 extends away from the surface, to the rest position in which the legs extend along the surface substantially parallel to each

other, and the support extends along the surface substantially parallel to the legs. The foldable stand therefore is foldable in an easy and user-friendly manner.

Furthermore, the legs enclose an angle α between them in the operational position, while extending along the surface. Thus a stable position of the stand on the surface is ensured while the legs have a relatively light construction. As can be seen in Figure 1a, this renders a compact foldable stand in its rest position, which is easy for storage purposes. It is advantageous when the legs enclose an angle of 30° between them in the operational position.

In this embodiment the stand has elements 13 for supporting the stand in a storage position with the legs and the support extending parallel to each other. This storage position could be for example the position of the stand in Figure 1a, rotated over 90° resting on elements 13 which then extend along the support surface. In this manner the folded stand can be easily stored away, for example in a closet or the like. These elements, but also the legs themselves, could be provided with wheels, in order to make the folded stand easily moveable in its rest position.

Figures 3a, b and c show a detail of a first embodiment of a foldable stand according to the invention. In this embodiment, each journal 4 has a semi-cylindrical recess 8 for cooperation with a semi-cylindrical protrusion 18 provided on the coupling element 7 via sliding surfaces 28 and rotating surfaces 38. In this embodiment the rotating surfaces are provided as rounded edges 38 on the semi-cylindrical recesses 8 of the journals 4 which cooperate with the sliding surfaces 28, but these rounded surfaces may also be provided as rounded edges on the semi-cylindrical protrusions 18 provided on the coupling element 7.

Figure 3b shows a position occurring during movement of the legs 3 in which the journals 4 slide over the co-operating sliding surfaces 28 and simultaneously rotate via the rotating surfaces 38. In this embodiment sliding and rotation is combined in one action, to ensure that the legs are moving simultaneously. This offers a simple construction of the journals and the coupling element.

Figure 4 shows a detail of a second embodiment of a foldable stand 1' according to the invention, in which the coupling element 7' has a central axis 75' and comprises two cylindrical parts 39 arranged in parallel extending transversally to said central axis 75', the central axis 75' of the coupling element 7' intersecting a central axis 5' of at least one journal 4' at the centre of at least one cylindrical part. For reasons of clarity, only one of the journals 4' is shown in the Figure. This construction is advantageous because it is

relatively simple, the housing is less heavily loaded and the coupling element needs no bearings in the housing.

Figures 5a, b and c show details of a third embodiment of a foldable stand 1" according to the invention. Figure 5a shows a top view of the housing 6", in which the coupling element 7" is provided for rotationally coupling the central axes 5" of the journals 4" of the legs 13" at an angle relative to each other. As can be seen in more detail in Figure 5b, the coupling element 7" comprises a central coupling shaft 71 provided with longitudinally extending grooves 72 along its outer surface, and the two journals 4" are provided with bevelled teeth 73 for cooperation with said grooves 72. For reasons of clarity, only one of the journals 4" is shown in the Figure. This construction is advantageous because it is solid and cost-effective.

Figure 5c shows a further detail of the third embodiment of a foldable stand 1" according to the invention, as enclosed by a dotted square in Figure 5a. The central axis 75" of the central coupling shaft 71, the longitudinal axis 78 passing through both teeth 73 and the central axis 76 of a bearing 77 carrying the journal 4" intersect at one point. In this manner the parts only move rotationally with respect to each other during operation, which renders the construction more robust.

It is observed that the foldable stand according to the invention is especially suitable for use in an irradiation device for the human body. However, the foldable stand according to the invention is also suitable for use with other types of irradiation devices, or for supporting other elements, such as for example a screen.

When the foldable stand according to the invention carries an element, it is noted that it is advantageous when in the operational position the element carried by the stand is provided in a plane above the location of the legs. Especially when the foldable stand according to the invention is used with an irradiation device for the human body, it is noted that it is advantageous when in the operational position the housing with the irradiation unit is provided in a plane above the location of the legs. When the user is lying on a bed during use of the irradiation device, the legs can thus be positioned under the bed during operation. In this manner the legs are not in the way and the space around the bed is left clear.

CLAIMS:

1. A foldable stand (1), comprising
 - a longitudinally extending support (2), which is carried by two legs (3), each leg (3) being connected to the support (2) via a journal (4) having a central axis (5),
 - said stand (1) being foldable between an operational position, in which the legs (3) extend
5 along a surface, and the support (2) extends away from the surface,
 - to a rest position, in which the legs (3) extend along the surface, and the support (2) extends along the surface substantially parallel to the legs (3),characterized in that
a housing (6) is provided to which the support (2) is fixedly mounted, and a coupling element
10 (7) is provided in said housing (6) for rotationally coupling the central axes (5) of the journals (4) of the legs (3) at an angle relative to each other.
2. A foldable stand as claimed in claim 1, characterized in that each journal (4)
has a semi-cylindrical recess (8) for cooperation with a semi-cylindrical protrusion (18)
15 provided on the coupling element (7), via sliding and rotating surfaces (28, 38).
3. A foldable stand as claimed in claim 1, characterized in that the coupling
element (7') has a central axis (75') and comprises two cylindrical parts (39) arranged in
parallel extending transversally to said central axis (75'), the central axis (75') of the coupling
20 element (7) intersecting a central axis (5') of at least one journal (4') at the centre of at least
one cylindrical part (39).
4. A foldable stand as claimed in claim 1, characterized in that in the stand (1)
has elements (13) for supporting the stand (1) in a storage position with the legs (3) and the
25 support (2) extending parallel to each other.
5. A foldable stand as claimed in claim 1, characterized in that the central axes of
the legs (3) enclose an angle of 30° in the operational position.

6. A foldable stand as claimed in claim 1, characterized in that the coupling element (7") comprises a central coupling shaft (71) provided with longitudinally extending grooves (72) along its outer surface, and the two journals (4") are provided with bevelled teeth (73) for cooperation with said grooves (72).

5

7. A foldable stand as claimed in claim 6, characterized in that the central axis (75") of the central coupling shaft (71), the longitudinal axis (78) passing through both teeth (73) and the central axis (76) of a bearing (77) carrying the journal (4") intersect at one point.

10

8. An irradiation device for the human body comprising a foldable stand, characterized in that the foldable stand is a stand according to any of the preceding claims.

ABSTRACT:

The invention relates to a foldable stand (1), comprising a longitudinally extending support (2), which is carried by two legs (3), each leg (3) being connected to the support (2) via a journal (4) having a central axis (5), said stand (1) being foldable between an operational position, in which the legs (3) extend along a surface, and the support (2) extends away from the surface, to a rest position, in which the legs (3) extend along the surface, and the support (2) extends along the surface substantially parallel to the legs (3), wherein a housing (6) is provided to which the support (2) is fixedly mounted, and a coupling element (7) is provided in said housing (6) for rotationally coupling the central axes (5) of the journals (4) of the legs (3) at an angle relative to each other. In this manner folding the stand between the operational position and the rest position requires only one operation from a user, because by moving the support from its operational position extending away from the surface to its rest position extending along the surface, the legs are automatically taken along from an operational position extending along the surface and enclosing an angle between them, to a rest position extending along the surface substantially parallel to each other.

Fig. 5a

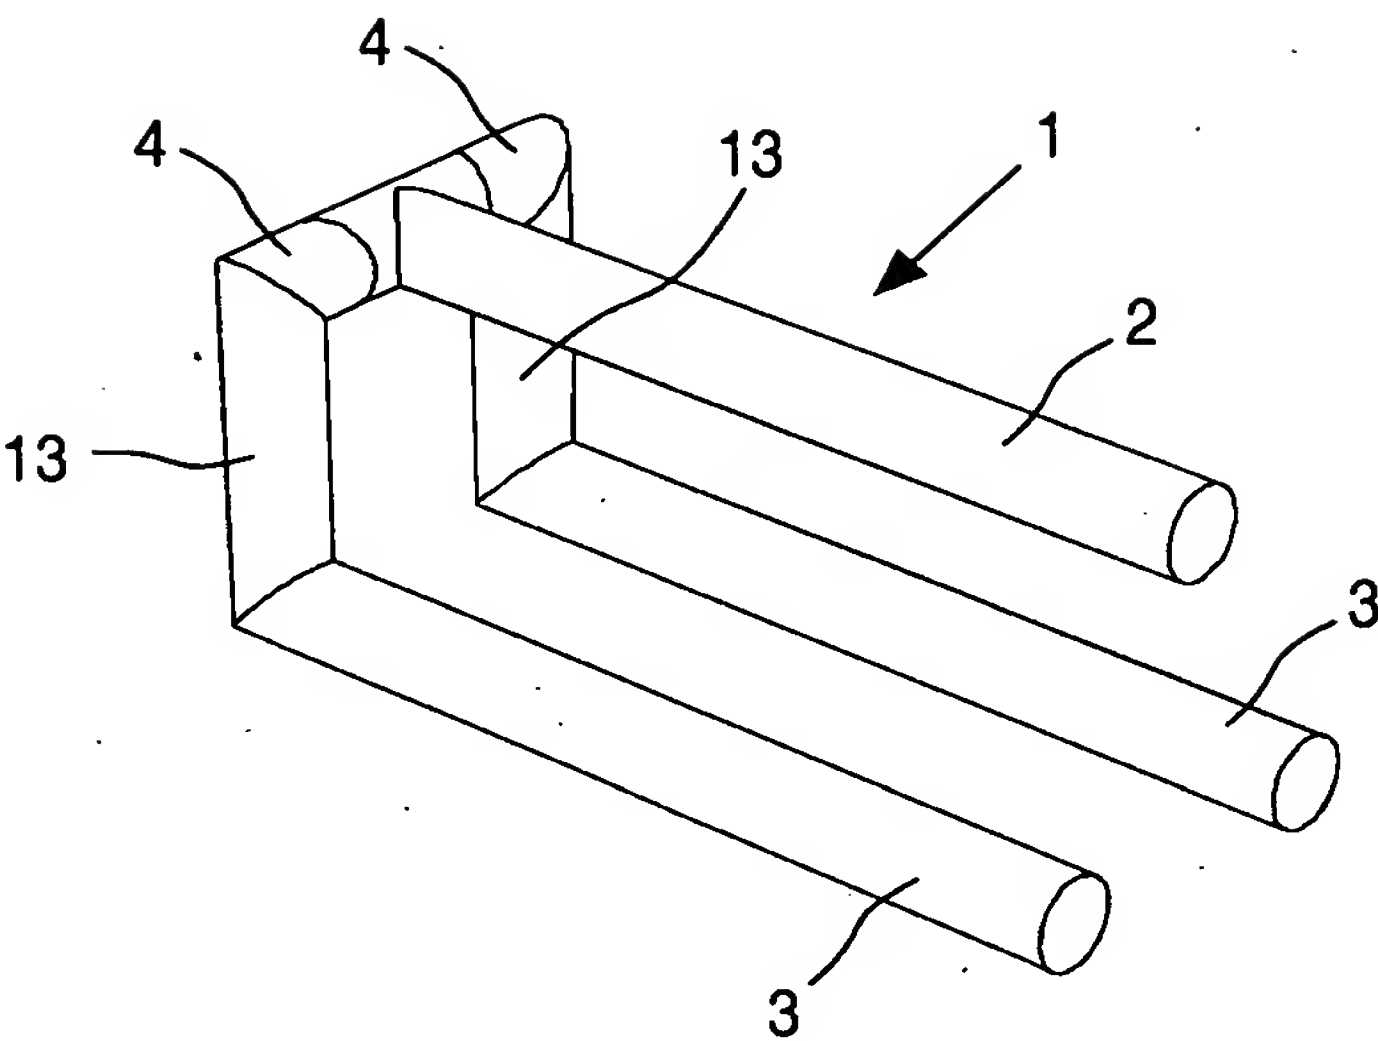


FIG. 1a

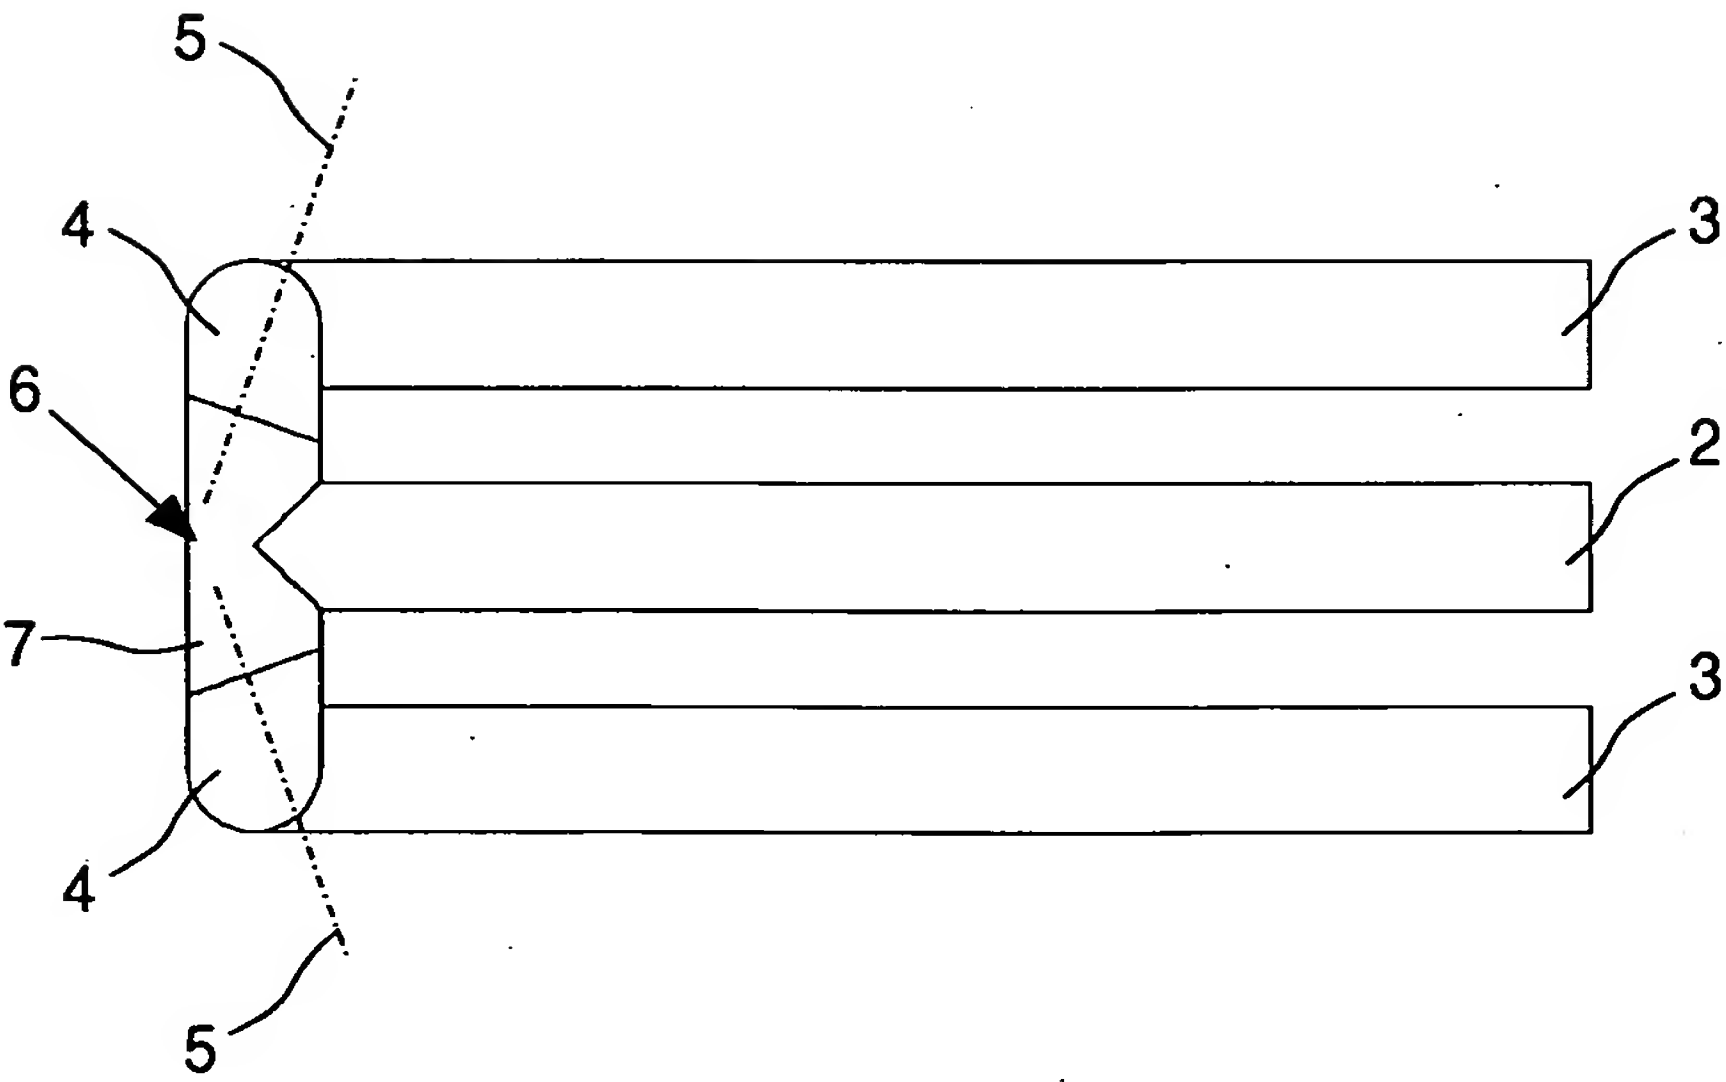


FIG. 1b

2/5

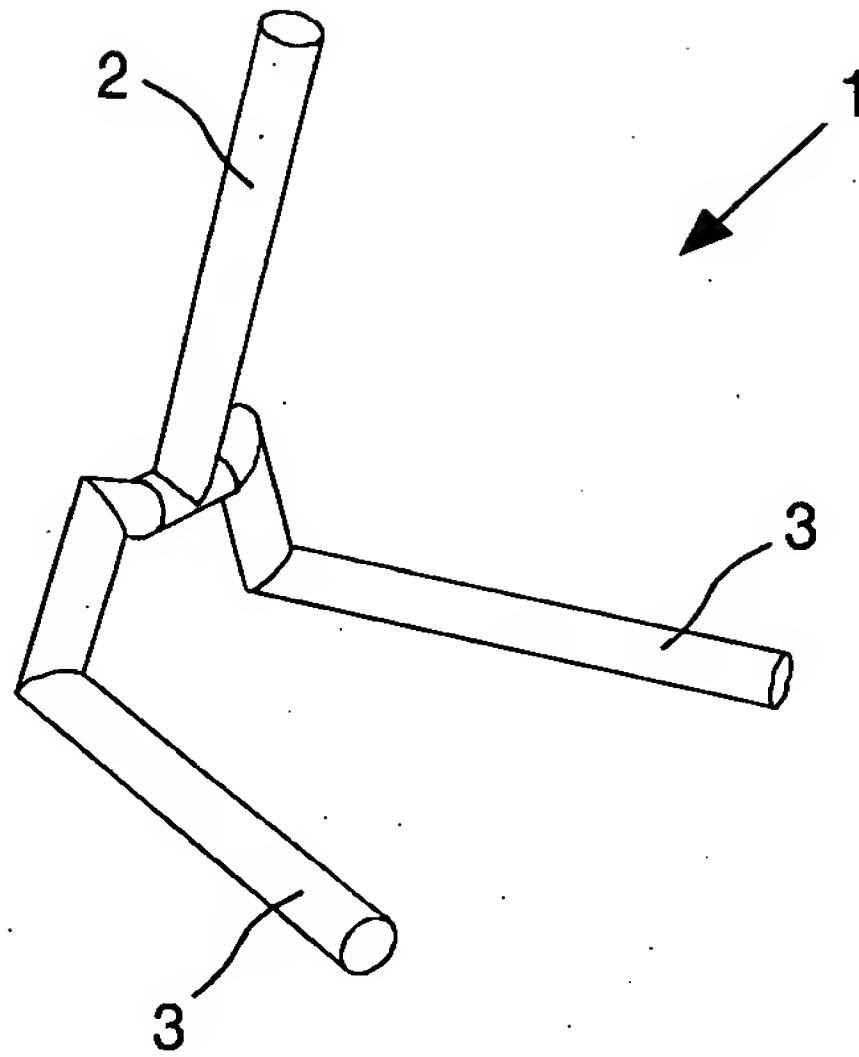


FIG. 2a

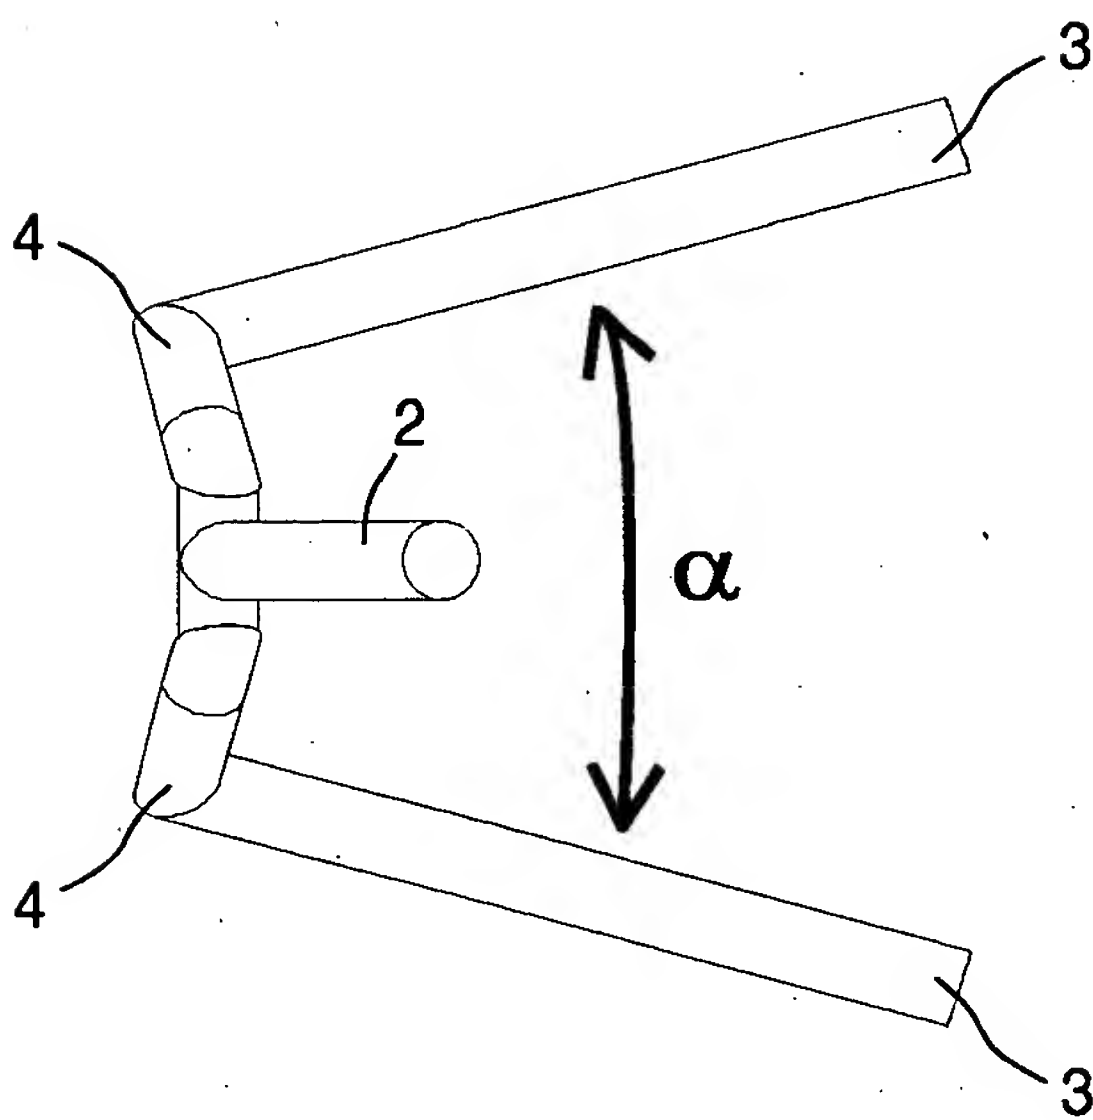


FIG. 2b

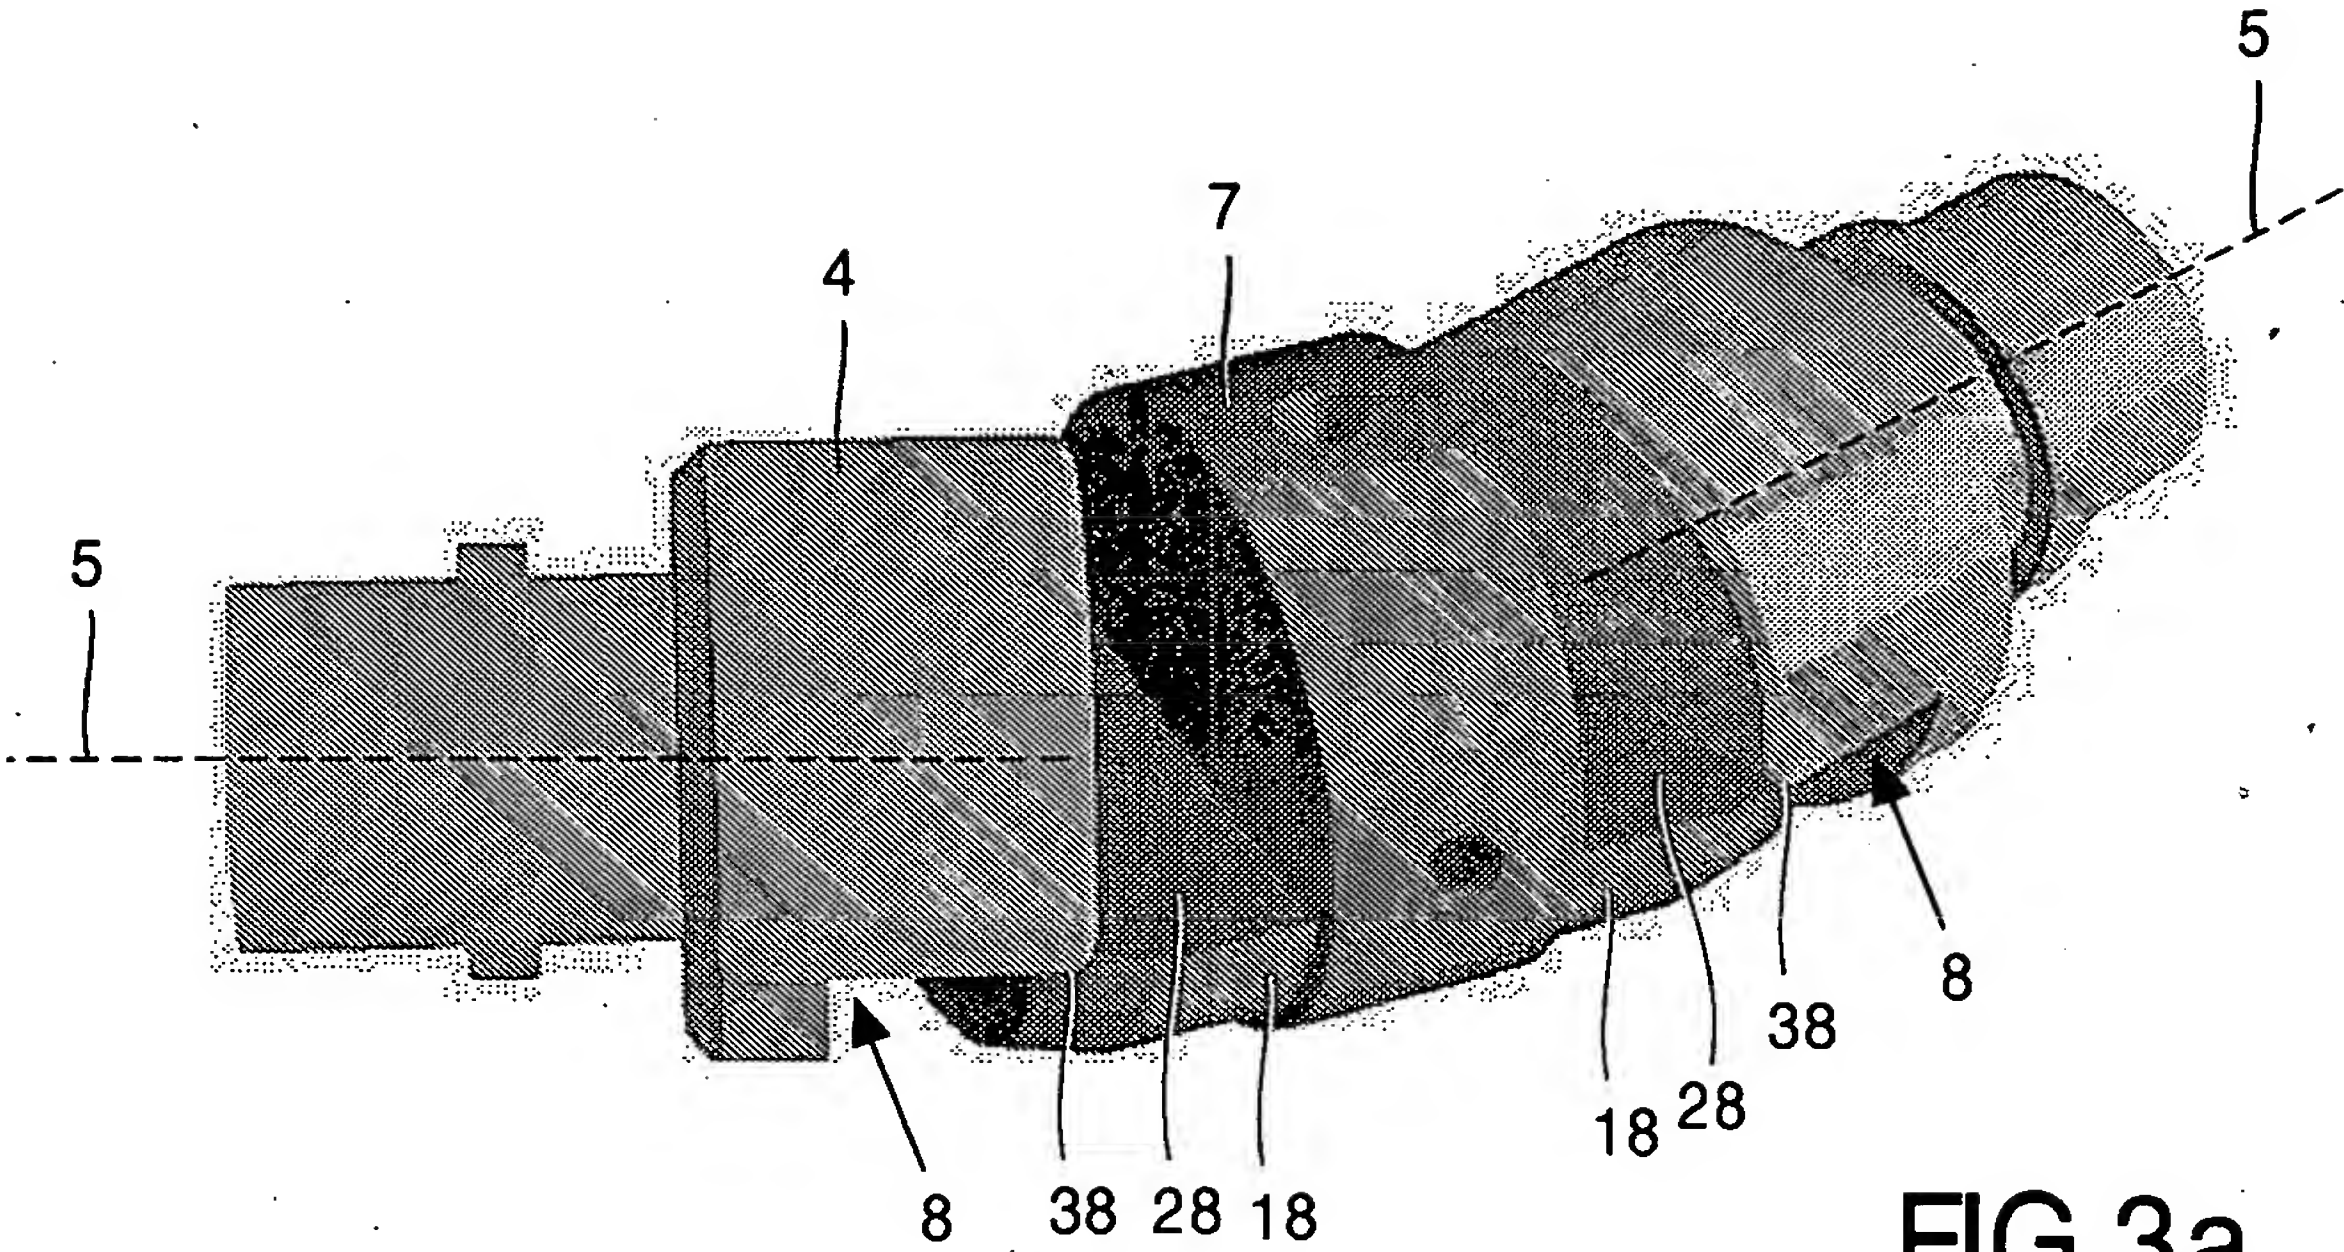


FIG.3a

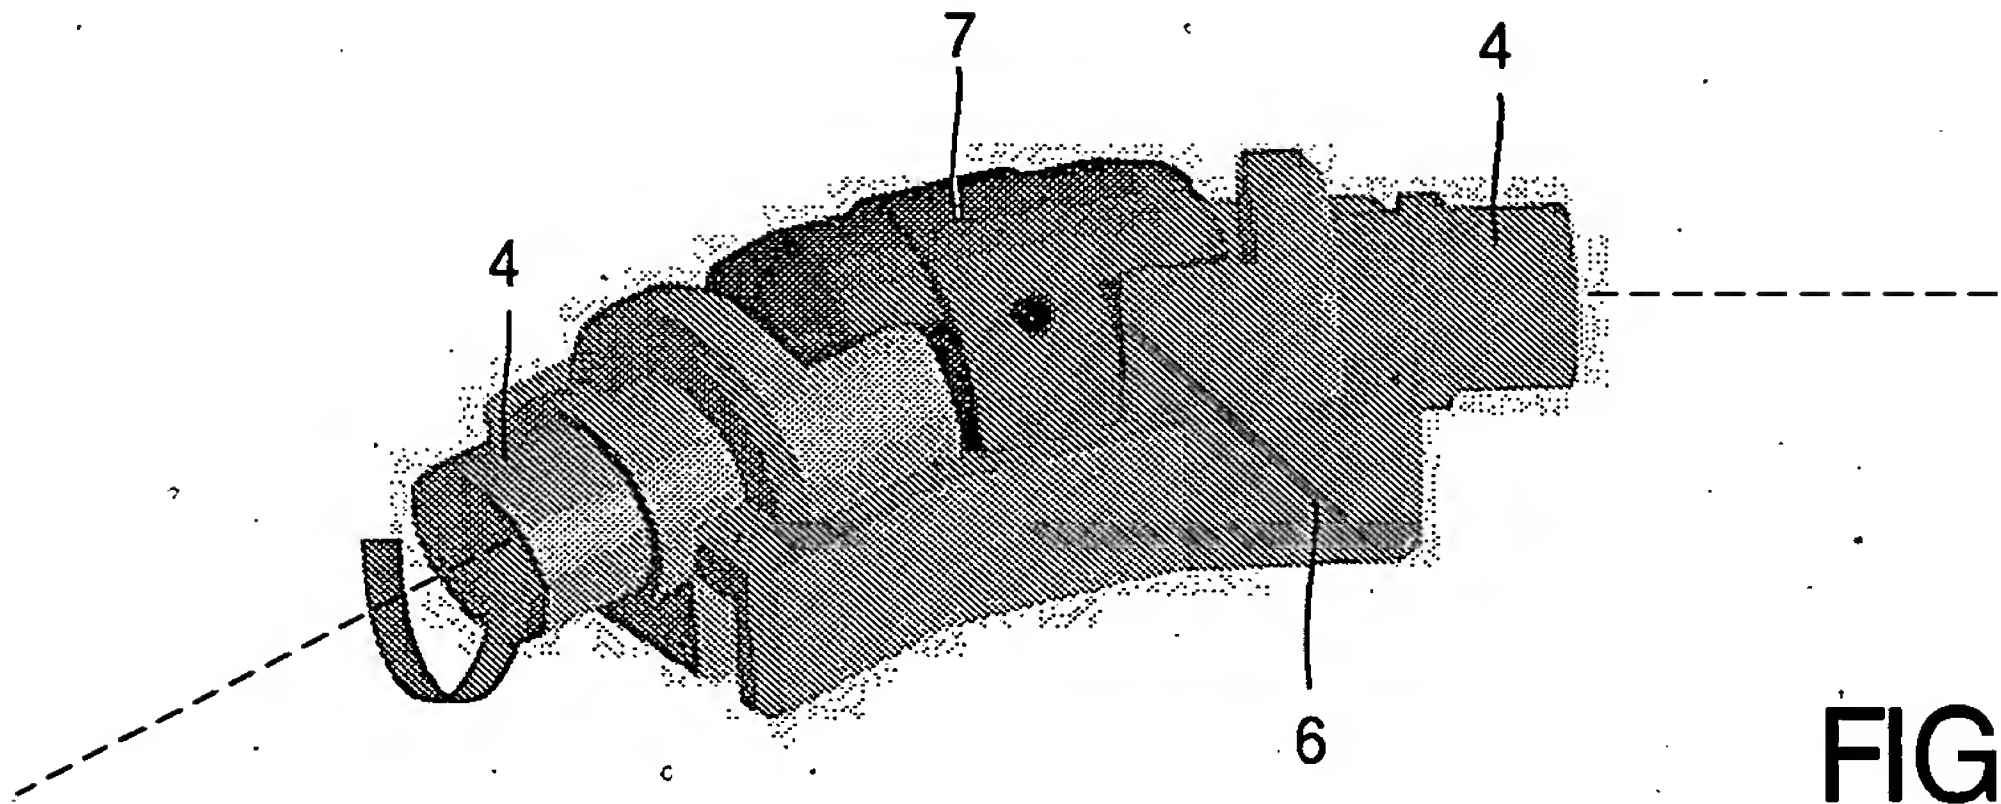


FIG.3b

4/5

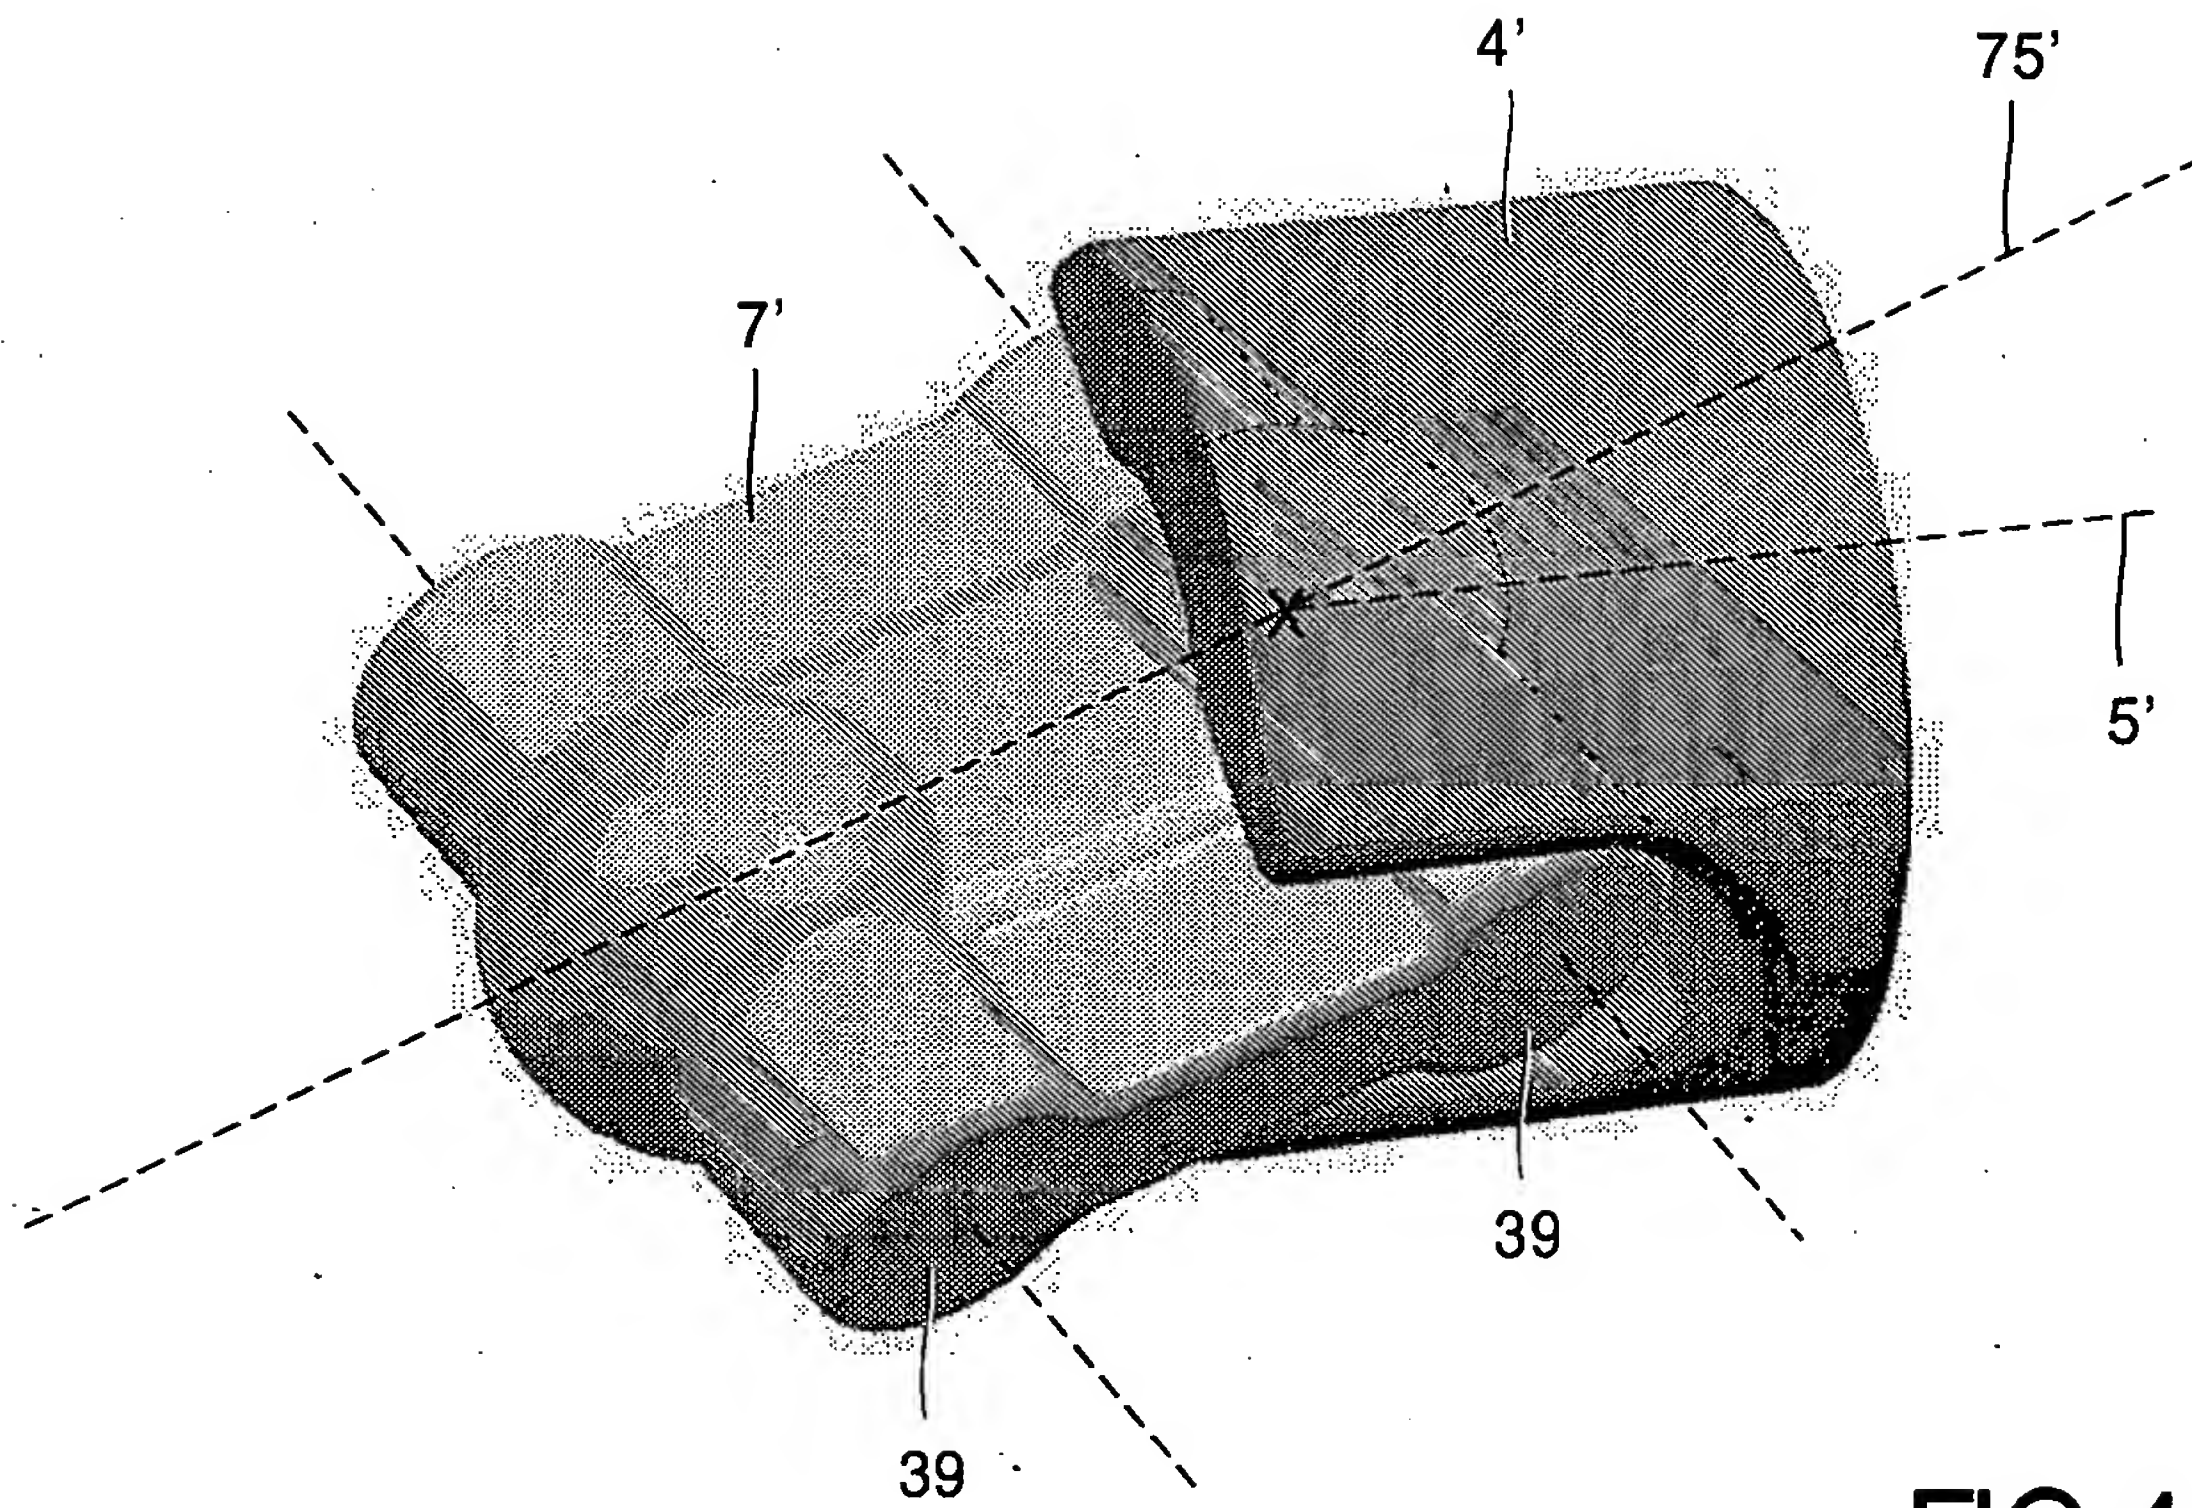


FIG. 4

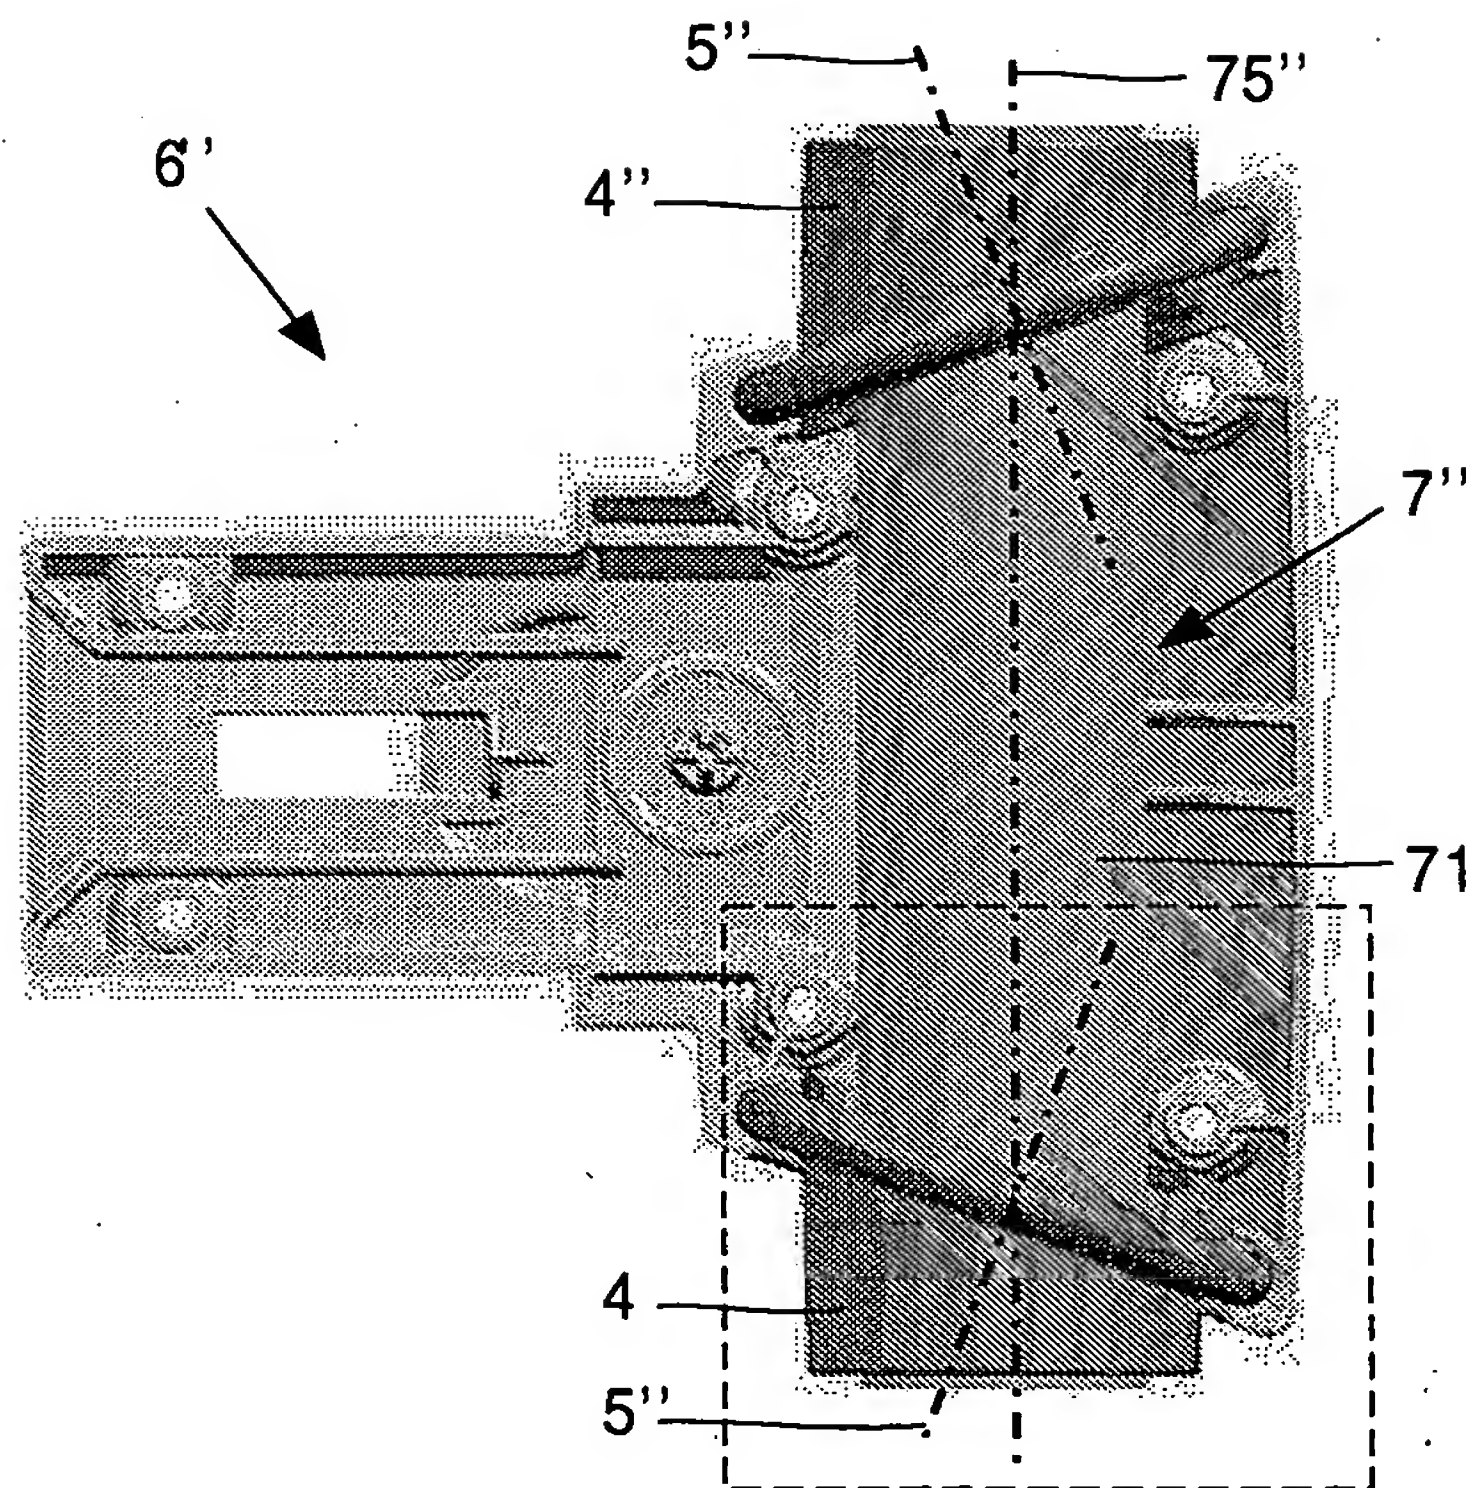


FIG. 5a

5/5

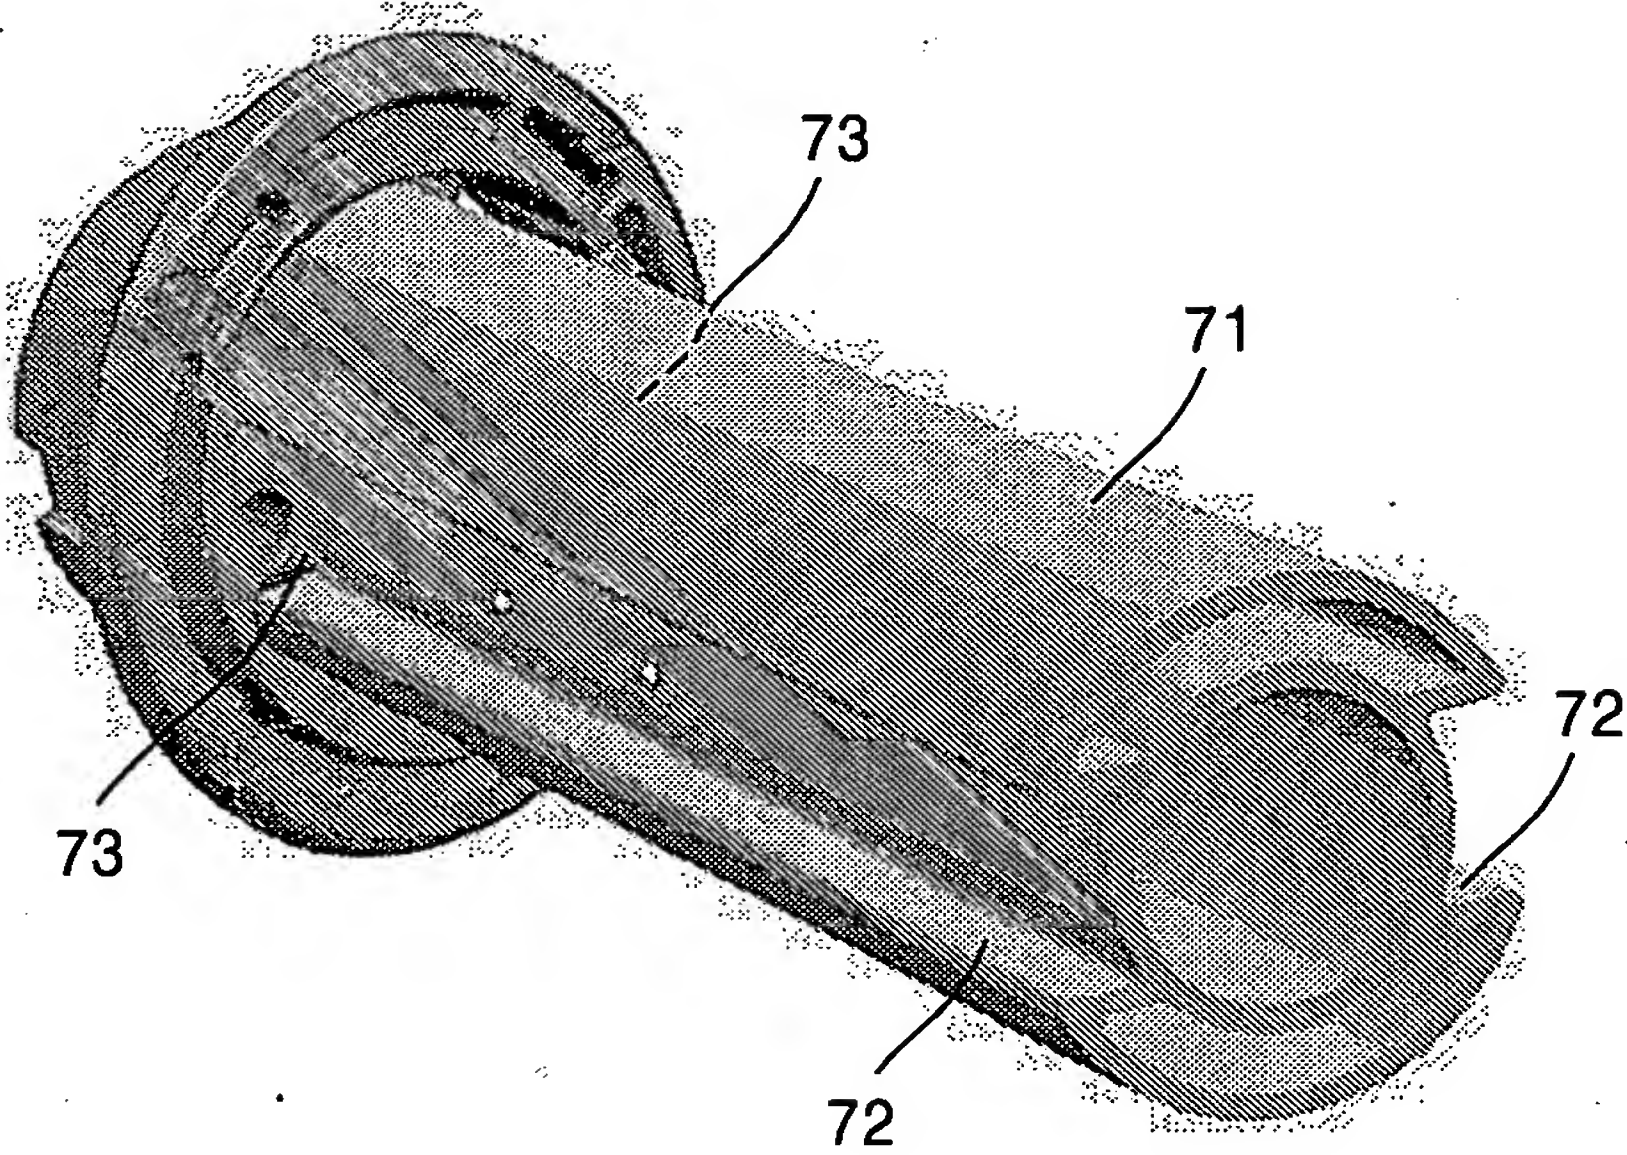


FIG. 5b

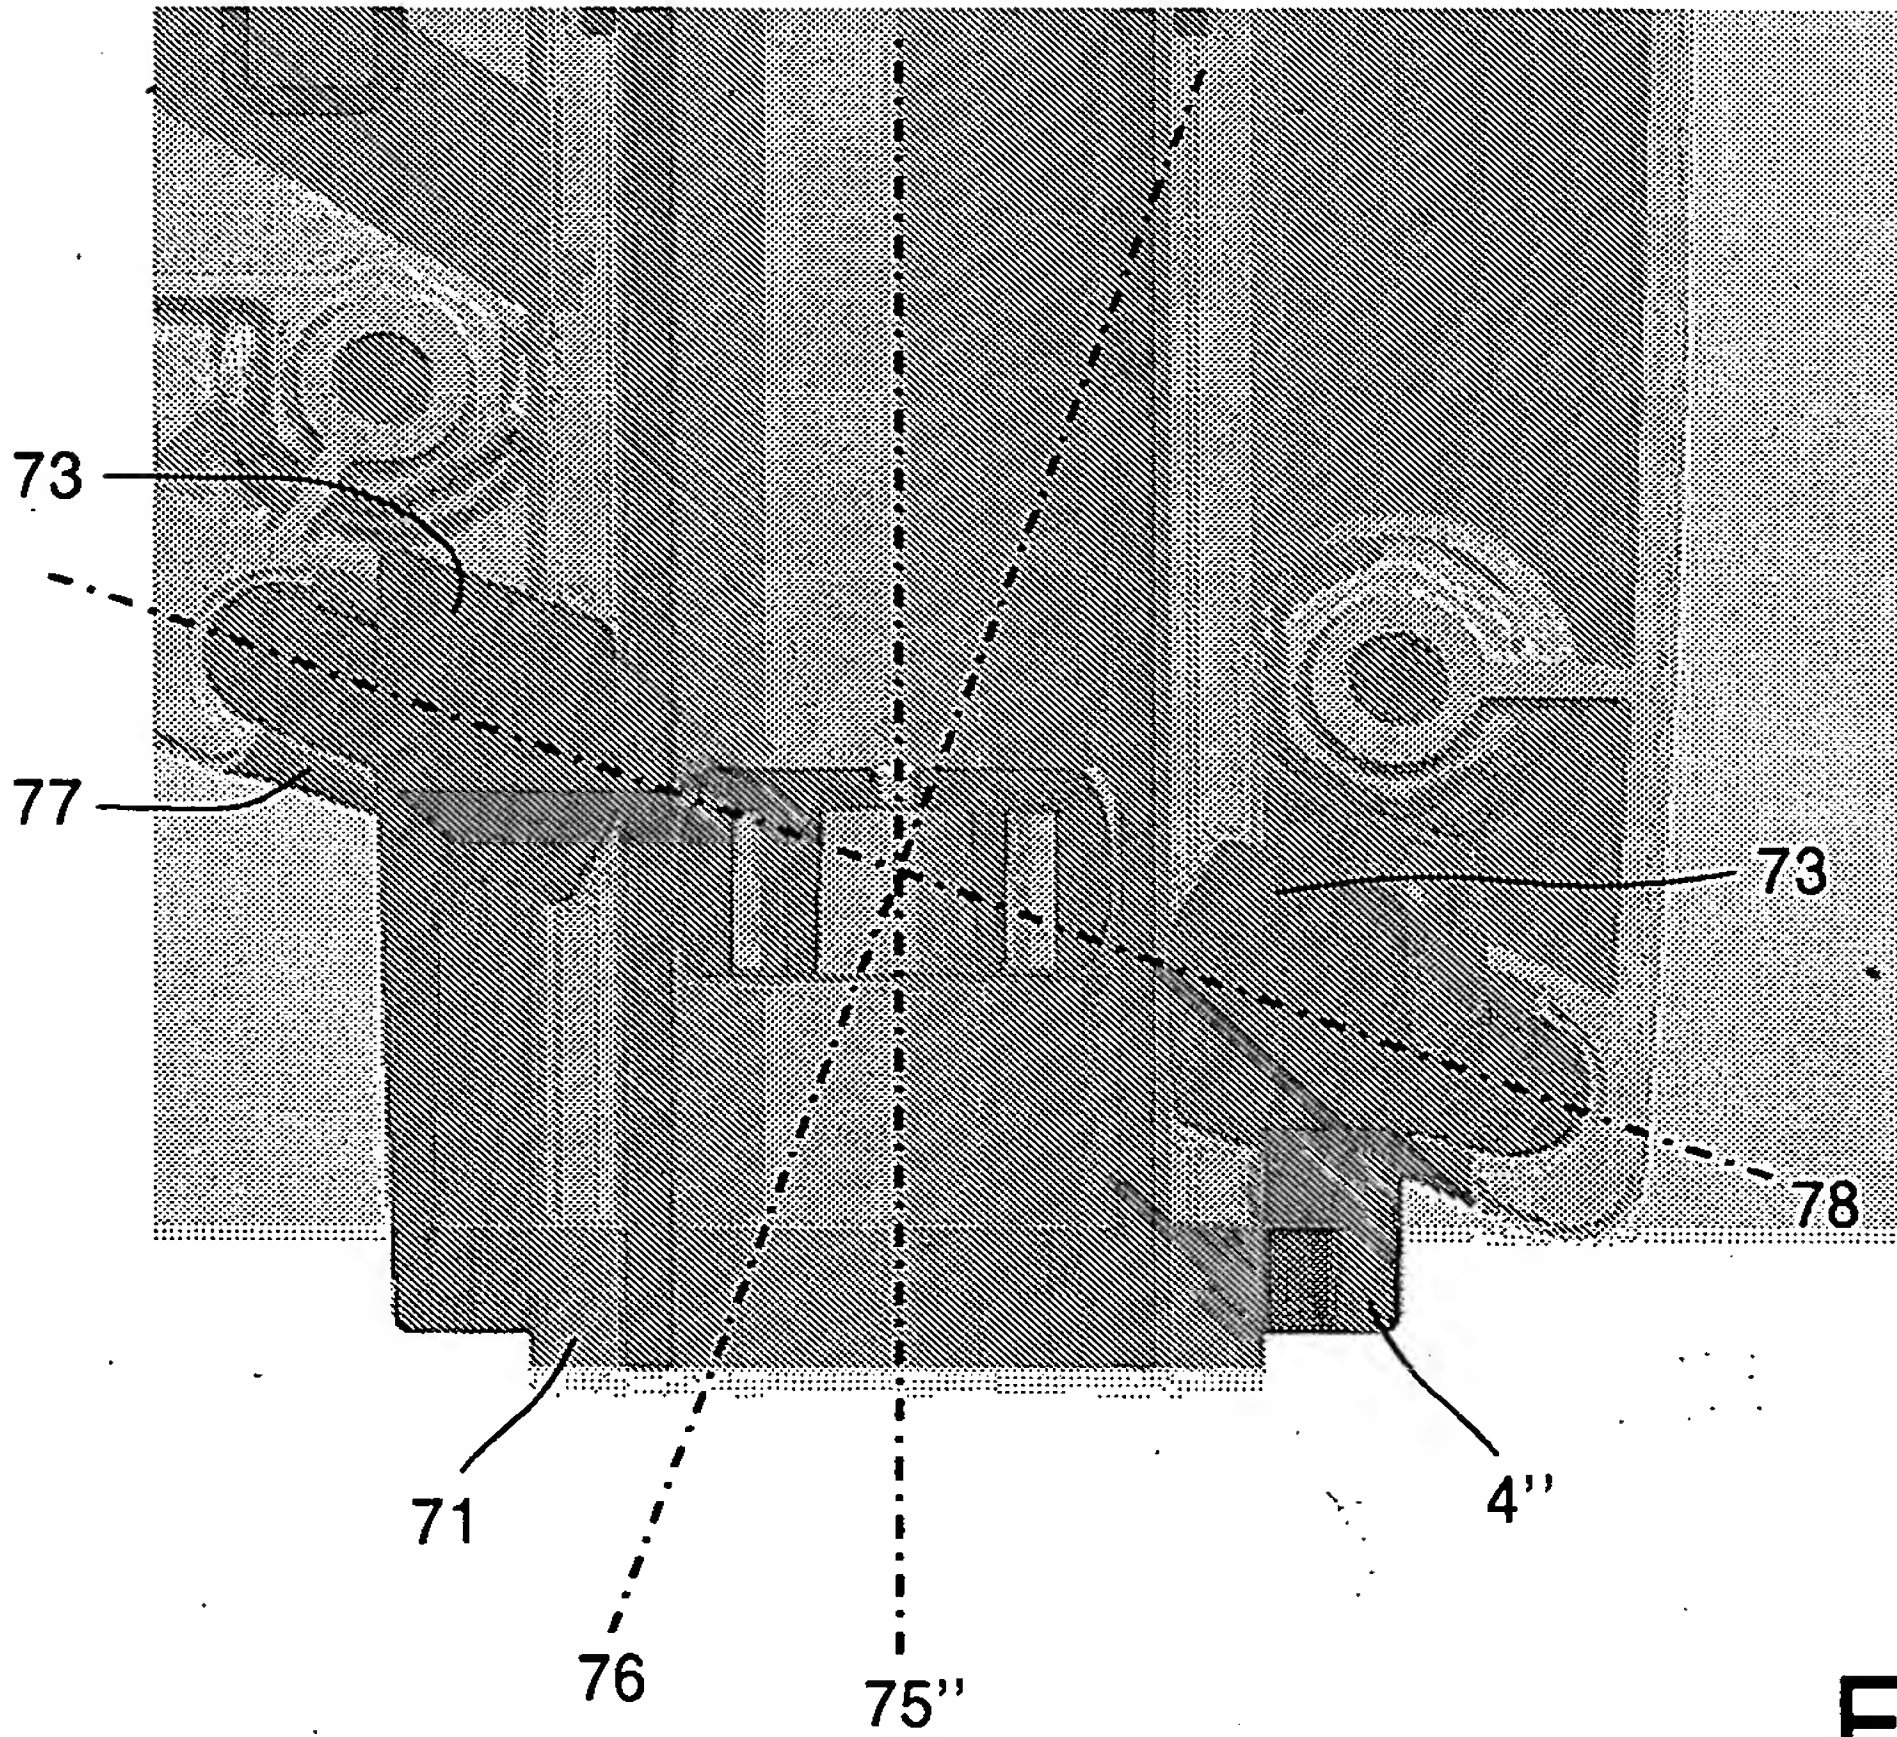


FIG. 5c